


# STARDUST 1000

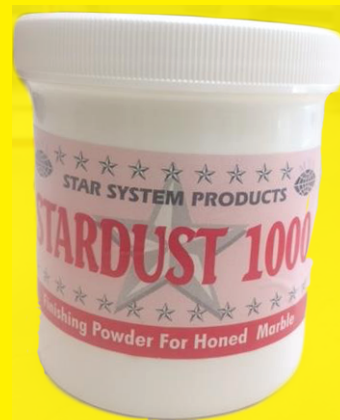

## ■ SINGLE STEP

*Cleans and restores factory honed finishes in a single application. No other chemistry or procedure is required.*

## ■ EASY TO USE

*Water activated, and as with all Star System Products, only standard floor equipment is required.*

## ■ COST EFFECTIVE

*Reduces direct maintenance labor and chemistry cost while providing a consistent appearance cure. No drying, curing or multiple applications required as with topical finishes.*

## ■ NATURAL CARE SYSTEM

*Stardust 1000 is specifically formulated to preserve and maintain the new appearance of honed and textured mineralized stone without the use of harsh acids or topical finishes.*

## DESCRIPTION

A powder formulated to maintain the factory honed, tumbled sandblasted or water finished of mineralized stone. Removes traffic pattern abrasion and accidental etching while cleaning the stone and grout. This product will not remove deep gouges or slippage. Stardust 1000 is formulated to be used as a restoring maintenance product and in conjunction with Starclean for daily maintenance.

## USES

Can be used on marble, limestone, onyx, serpentine, travertine and all unpolished mineralized stone. Excellent for post construction clean up, grout film removal and eliminating factory finish blemishes. NOT FOR USE ON GRANITE.

## COVERAGE

Approximately 250 to 400 square feet per pound depending on condition of surface being treated and size of grout matrix.

## DIRECTIONS

**The use of 175 rpm floor machine (minimum weight 100 pounds) with solution tank shower-feed pad driver and a white floor pad is recommended. For 300 RPM machines, a splash guard is also recommended.**

■ Sprinkle Stardust 1000 on floor in a circle equal to the size of the machine being used. Approximately 6 ounces or one-third pound of powder is recommended to build initial slurry. Set machine directly on the Stardust 1000 that has been applied to the floor. With solution tank water control, apply water to floor BEFORE turning on machine. Add water or Stardust 1000 as necessary to create a watery slurry. Maintain the consistency of slurry during the entire honing and cleaning process. Rotation of machine may splatter working slurry. Protect adjoining areas of carpet was treatments, etc.

■ If macing is not equipped with solution tank, manually add water to Stardust 1000 powder BEFORE turning on machine. Create working slurry as in Step 1.

■ For Control, work areas of no more than 15 to 20 square feet at a time. DO NOT ALLOW SLURRY TO DRY ON SURFACE AT ANY TIME.

■ After 3 to 4 rotations over initial area being worked, pull slurry back with window or floor squeegee to check for desired results. Heavy traffic areas may require additional attention to remove traffic abrasion. Work traffic areas first, blending toward perimeter and non-traffic areas for best results. After initial area being worked is completed, move slurry to next adjacent area to be worked.

■ IMMEDIATELY FLOOD MOP AND WET VAC COMPLETED AREA WITH STARCLEAR SOLUTION. This will ensure all residue is removed from finished area. Certain types of grout may turn white if Stardust 1000 is left in grout line, if a wet vac is not used. Completely agitate residue from grout lines.

■ Repeat honing process using the same slurry adding Stardust 1000 and/or water as necessary to maintain watery slurry.

■ Mop up or wet vac slurry after one pound has completed 250400 square feet.

■ Repeat Step 1.

## QUANTITIES AVAILABLE

Case (12) 1 lb. Containers

Case (4) 8 lb. Containers

40 lb. Pail